

222 Cavalcade Street, 77009-3213
P.O. Box 8768, Houston, Texas 77249-8768
Tel: (713) 692-9151 Fax: (713) 696-6205

Attention: Jim Ahlander
FasTower
861 So. Center Street
MESA, AZ 85210
P: 602 327 1595 / F: 480/898-1444


W/O. No.: FAS002-02-10-77508-3
P.O. No.:
Report Date: 2/23/2011

8" Caster for Retractable Scaffolding Frame


Test Method: ANSI/SSFI SC100-5/05

Ultimate Load Test with 5° Offset


Maximum Load (lbs)	Failure Type
5,290	Stem Deflection and Tire Breakdown

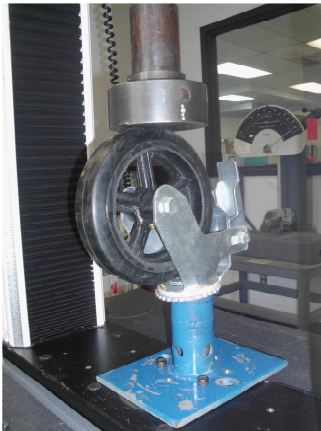

Loading

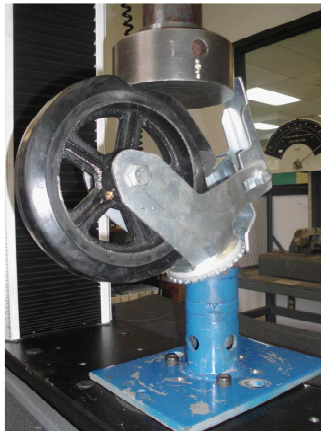


Failure

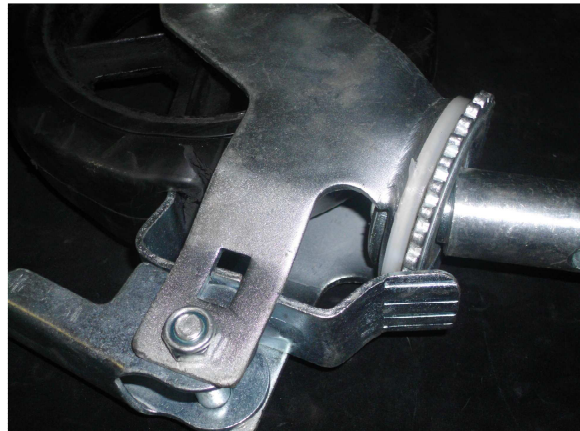

Failure (Detail)

Our letters and reports are for the exclusive use of the client to whom they are addressed and shall not be reproduced except in full without the approval of the testing laboratory. The use of our name must receive our written approval. Our letters and reports apply only to the sample tested and/or inspected, and are not indicative of the quantities of apparently identical or similar products. Unless otherwise noted all test methods and specifications are to the most current revision. Material submitted to our metals department will be discarded after a period of 30 days unless otherwise directed. Stork SWL, is an operating unit of Stork Materials Technology B.V., Amsterdam, The Netherlands, which is a member of the Stork group

Respectfully Submitted


Terry Wilt
Manager, Product Evaluation